

75 Ohm CWDM L-Band HTS

- **Up to 16 channels in a single fiber**
- **65dB dynamic range for 500MHz traffic**
- **L-Band HTS (700-2450MHz)**
- **13/18V and 22KHz tone LNB option**
- **Blind mate option**
- **Standard 5 year warranty**



ViaLiteHD L-Band HTS CWDM Fiber Optic links use coarse wavelength division (CWDM) multiplexer lasers and have been designed for the broadcast satellite industry to transport RF signals between antennas and control rooms, where reducing fiber count is key. Due to their very wide dynamic range, the same link can be used in both the transmit and receive paths, over the same fiber. This dynamic range allows High Throughput Satellite (HTS) transponder bandwidths of 500MHz, 800MHz or even 1500MHz to be transported, as well as multiple standard 36MHz transponders.

The chassis mounted cards are available with the **VialiteHD** blind mate option, which allows all cables to be connected at the rear of the chassis when installed. It also allows configuration changes to be completed without disturbing the connections and very fast changeover of cards, enabling five 9s reliability.

Options include:

- 75Ω electrical connectors: BNC, F-Type and MCX
- Optical connectors: SC/APC, LC/APC, FC/APC and E2000/APC
- Test ports on Tx and Rx modules
- Built-in BiasT for LNB powering through RF connection
- LNB control circuit with 13/18VDC and 22kHz tone
- Blind mate connectivity (SC/APC and SMA)
- Serial digital channel to 20kb/s on same optical path

Applications

Fiber count reduction
Broadcast facilities
Mobile SNG, military and flyaways
Television Receive-Only (TVRO)
Fixed satcom earth stations and teleports
VSAT hubs (IP gateways)
Marine antennas
Telemetry, Tracking and Command (TT&C)
Oil and gas platforms


Formats

3U Chassis
1U Chassis
Blue OEM
Yellow OEM
Outdoor enclosures

Related Products

50km L-Band HTS
50 Ohm CWDM L-Band HTS
HTS 100km+ systems
DWDM links

Product Configurator

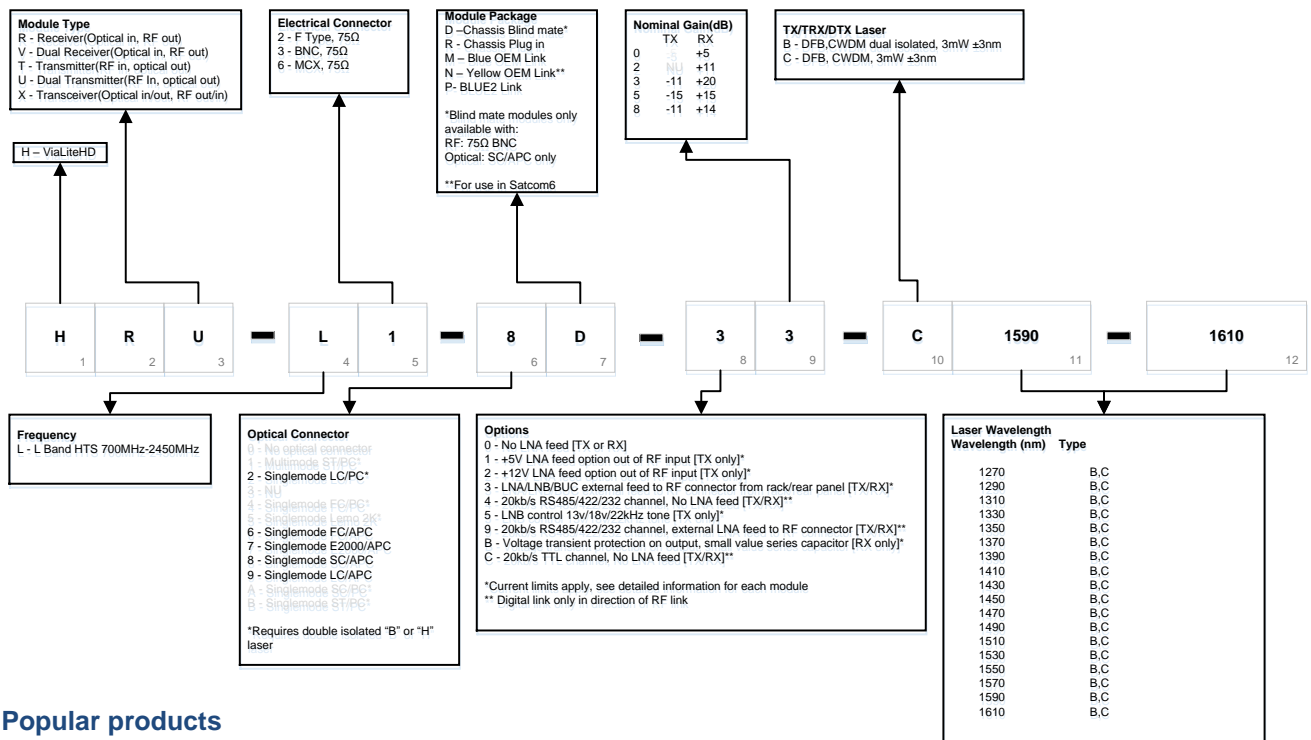

Popular products

HRT-L3-6R-58-C1610

L-Band HTS (700-2450MHz) chassis plug in transmitter with built-in LNB power, 75 ohm BNC and FC/APC connectors

HRU-L3-8D-38-C1590-1610

L-Band HTS (700-2450MHz) dual chassis plug in transmitter with built-in BiasT, 75 ohm BNC and SC/APC blind mate connectors

HRR-L3-8D-08

L-Band HTS (700-2450MHz) chassis plug in receiver with 75 ohm BNC and SC/APC blind mate connectors

HRV-L2-8R-08

L-Band HTS (700-2450MHz) dual chassis plug in receiver with 75 ohm F-Type and FC/APC connectors

HRX-L3-8D-38-C1610

L-Band HTS (700-2450MHz) chassis plug in transceiver with 75 ohm BNC and SC/APC blind mate connectors

HRR-L6-8N-08

L-Band HTS (700-2450MHz) Yellow OEM receiver with 75 ohm MCX and FC/APC connectors

RF parameters for popular link gains

Link	Tx Gain	Rx Gain	Link Noise Figure (Default Tx Gain)	Link Noise Figure (Max Tx Gain)	Link P1dB (Default Tx Gain)	Link P1dB (Max Tx Gain)
HRT-L1-xx-x8-C1610 & HRR-L1-xx-x8 (3dB Gain Link)	-11dB (+7.5/-8dB)	+14dB (+7.5/-8dB)	21dB	13.5dB	0dBm	-7.5dBm
HRT-L1-xx-x5-C1610 & HRR-L1-xx-x5 (Unity Gain Link)	-15dB (+11.5/-4dB)	+15dB (+7.5/-8dB)	25dB	13.5dB	+2dBm	-8.5dBm
HRT-L1-xx-x8-C1610 & HRR-L1-xx-x2 (Low Noise Unity Gain Link)	-11dB (+7.5/-8dB)	+11dB (+7.5/-8dB)	21dB	13.5dB	0dBm	-7.5dBm


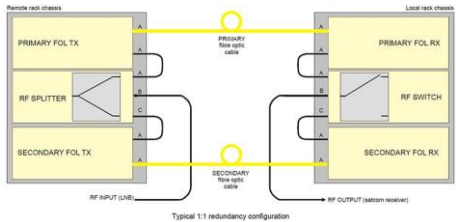


Technical specification

	Units		L-Band HTS 75 ohms
Transmitter			HRT-L3-8D-38-C1610 (example)
Receiver			HRR-L3-8D-08 (example)
Frequency range	MHz		700-2450
Impedance, RF connector			75Ω BNC, blind mate
VSWR	(typ)		1:1.5
Link gain (TX gain / RX gain), default	dB (nom)	a	+3 (-11 /+14)
TX gain adjustment range	dB (typ)		15.5
TX gain adjustment from default gain	dB (typ)		-7.5 to +8.0
RX gain adjustment range	dB (typ)		15.5
RX gain adjustment from default gain	dB (typ)		-7.5 to +8.0
Gain adjustment step size Rx and TX	dB (typ)		0.5
Flatness, fullband	dB (max)	a h	±1.4
Flatness, fullband	dB (typ)	a h	±0.6
Flatness, 36MHz	dB (typ)	a	±0.2
Gain stability over temperature range	dB (max)	a	±3
Gain stability	dB (typ)		0.25 @ 24 hrs
Nominal input signal / output signal	dBm		-20 / -20
IMD @ nominal output power	dB (typ)	c	-50
CNR @ nominal input power, 36MHz	dB (typ)	b	56
P1dBinput	dBm (typ)	a k	0
P1dBinput, at minimum TX gain	dBm (typ)	a k	5
IP3input, at default gain	dBm (typ)	a k	12
Noise figure, at default gain	dB (typ)	a k	21
Noise figure, at maximum TX gain	dB (typ)	a k	18
Noise figure, 5dB optical loss	dB (typ)	c k	27
SFDR	dB/Hz ^{2/3} (typ)	a	110
Test port gain, transmitter	dB (typ)	l	-26
Test port gain, receiver	dB (typ)	l	-14
Test port flatness	dB (typ)	l	±1
Maximum input power without damage	dBm (min)		15
LNB power			external 0-28V @ 350mA from chassis power connector
Power configuration Tx	W (typ)		1.9
Power configuration Rx	W (typ)		1.3
Optical connector			SC/APC, blind mate
Optical wavelength	nm		1270-1610 ± 3
Laser type			DFB (Distributed feedback) laser
Optical power output	dBm (typ)		4.5
Summary alarm output			Open drain alarm: OPEN: Alarm, CURRENT SINK: okay
Operating temperature range			-10°C to +50°C
Storage temperature range			-40°C to +70°C
Humidity	RH		95% non-condensing humidity



- a Nominal input power @ 0dB optical loss
 - b Nominal input power @ 1dB optical loss
 - c Nominal output power @ 5dB optical loss
 - h Default gain setting
 - k Measured @ 1.2GHz
 - l Relative to rear port @1.2GHz
- All tests @ 25°C after 15 minutes warm up

Accessories

Type	Key Features
	<ul style="list-style-type: none"> • Easy to use graphical user interface (GUI) • Real time monitoring of card performance • Alarm monitoring and event logging • Control of gain adjustment • Compatible with all ViaLiteHD rack chassis and modules • Easy integration with network management systems (NMS) using management information base (MIB) tables • Actively manage redundancy switching • New RF cards can be automatically reprogrammed with the previous card parameters • Remote SNMP to local SNMP connection via optical fiber • Provides remote LAN 10/100 Ethernet link
<h3>Dual Redundancy</h3>  <p>Typical 1:1 redundancy configuration</p>	<ul style="list-style-type: none"> • 1:1 redundancy for L-Band • Maximises link up-time • Can be used to backup copper coax • Manual and automatic control via SNMP • Flexible configuration options • Other redundancy options available
<h3>Rack Chassis</h3> 	<ul style="list-style-type: none"> • 3U accepts up to 13 RF or Support cards, plus an SNMP card and dual power supplies • A 1U chassis accepts up to 3 RF or Support cards or 2 cards and an SNMP card (with dual power supplies) • Up to 26 channels per 3U chassis (using dual RF cards) – reducing the amount of rack space required • Blind mate option • All modules hot-swappable and auto reconfiguration with SNMP option • On-card LNB and BUC power options • Power fed through rear chassis connector to card Bias Tees • System can be monitored and controlled remotely via SNMP using a web browser
<h3>Outdoor Enclosures</h3> 	<ul style="list-style-type: none"> • CE approved and EMC compatible • IP rated and NEMA approved • Plug and play format • Suitable for harsh environments • All modules hot swappable • Dual redundant power options • Interface for monitor and control (M&C) systems